


CFR & CFS

FORMED
VENT PANELS

PROVIDES
INSTANTANEOUS
OVERPRESSURE
PROTECTION

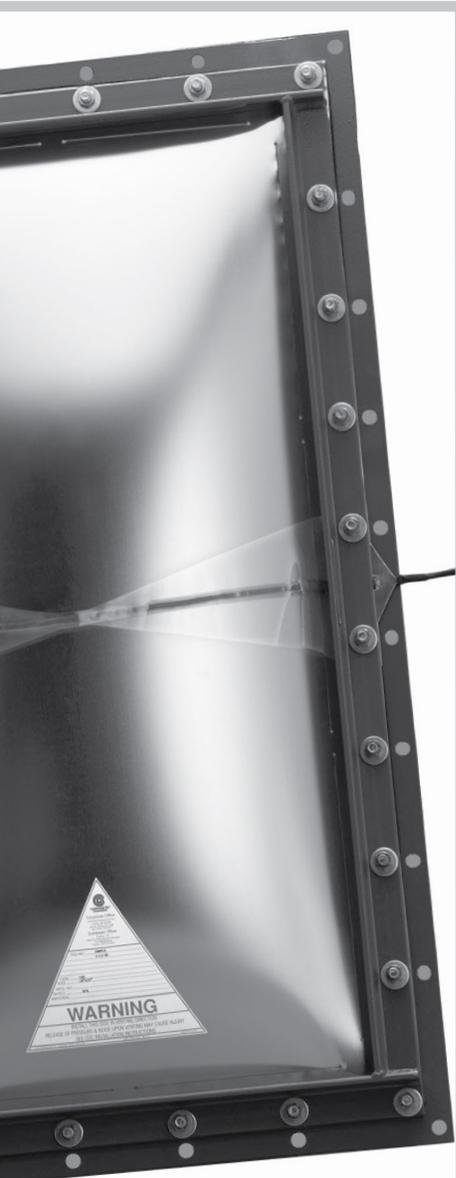

The Composite Formed RECTANGULAR (CFR) and Composite Formed SQUARE (CFS) Vent Panels are designed to provide **instantaneous overpressure protection** for dry, bulk handling and storage equipment, such as dust collectors, air scrubbers, sieves, elevators, driers, silos, spreaders and screens.

The CFR and CFS Vent Panels are **designed to allow a full and immediate opening to minimize structural or mechanical damage that may be caused by expanding gases**. These gas expansions can result from the deflagration* of dust, gases or mists in equipment, rooms, buildings or other enclosures.

FEATURES

- Operating ratio up to 80% of minimum tagged rating
- Withstands 1-1/2 psig (0,104 barg) vacuum (consult factory for vacuum requirements exceeding 1-1/2 psig)
- Non-fragmenting design
- Burst tolerance $\pm 25\%$ for ratings up to 2 psig (0,14 barg) and ± 0.5 psig (0,035 barg) for ratings above 2 psig (0,14 barg)
- Excellent cyclic service capabilities (pressures going from positive to negative or negative to positive)
- Full instantaneous opening
- Fully opens under dynamic or static pressure conditions
- INTERCHANGEABLE with existing vent panel applications
- Available with Continental's B.D.I.[®] (Burst Disc Indicator) Alarm System

SPECIFICATIONS

Both the CFR and CFS Vent Panels have a standard material construction of 316 SS top section, TFE fluoropolymer seal and 316 SS vacuum support. Each configuration is available in burst pressures from 1.0 psig (0,07 barg) through 10 psig (0,69 barg). Refer to [Table 1](#) for size and pressure specifications.

MAXIMUM OPERATING PRESSURE & BURST TOLERANCE

- The recommended operating pressure for the CFR and CFS Vent Panels is 80%. In addition, CFR and CFS Vent Panels have a burst tolerance of $\pm 25\%$ for burst ratings up to 2 psig (0,14 barg) and ± 0.5 psig (0,035 barg) for burst ratings above 2 psig (0,14 barg). To determine the recommended operating pressure, subtract the burst tolerance from the vent panel's burst rating which establishes the minimum burst pressure, then multiply by 80%.
- For example, a CFR or CFS Vent Panel rated 3.0 psig (0,21 barg) will have a minimum burst pressure of 2.5 psig (0,17 barg) and a recommended operating limit of 1.75 psig (0,12 barg). (Burst rating minus burst tolerance x .80).

* Deflagration as defined under NFPA-68 is: "Burning which takes place at a flame speed below the velocity of sound in the unburned media." Vent panels are not generally suitable for protection against pressure or shock waves produced from detonation of dust, gases, mists or explosives. Detonation as defined by NFPA-68 is: "Burning which takes place at a flame speed above the velocity of sound in the unburned media."

TABLE 1 // CFR and CFS Vent Panels

NORMAL SIZE		VENT AREA		Burst Pressure at 72°F (22°C)			
Gaskets inches	cm	ft ²	m ²	minimum		maximum	
				psig	barg	psig	barg
18 x 35	46 x 89	4.01	0,373	1.0	0,07	10.0	0,69
24 x 24	61 x 61	3.67	0,341	1.0	0,07	10.0	0,69
24 x 36	61 x 91	5.58	0,518	1.0	0,07	10.0	0,69
36 x 44	91 x 112	10.44	0,969	1.0	0,07	10.0	0,69

Gaskets are available for both vent panel configurations. Materials include black neoprene, silicone rubber, white FDA-grade rubber and fiberglass rope. Gaskets are “key locked” together at the corners to ensure a leak-tight seal (except on fiberglass). Refer to [Table 2](#) for temperature limitations.

FRAMING

Vent panel framing for square and rectangular configurations are available in carbon steel, stainless steel, aluminum or other specified materials. The outlet frame is typically constructed of 1 1/2" x 1 1/2" x 1/4" carbon steel angle iron, stainless steel angle or aluminum angle. The inlet frame is constructed of flat bar with the vent panel mounting studs permanently attached to the frame. Bolting or welding is used to mount the frame to the structure. Refer to [Table 3](#) for vent panel frame dimensions.

TABLE 2 // Recommended Gasket Temperature Limits

GASKET MATERIAL	MAXIMUM TEMPERATURE
Black Neoprene	250°F / 121°C
Silicone Rubber	250°F / 121°C
Fiberglass Rope	250°F / 121°C
White FDA Grade Rubber	250°F / 121°C

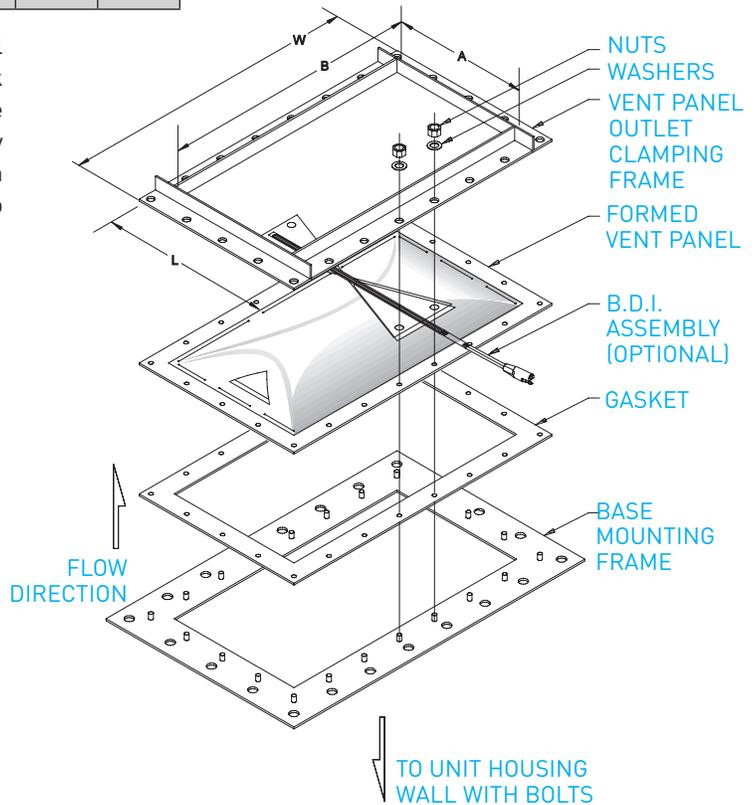


TABLE 3 // CFR and CFS Vent Panel Frames

NORMAL SIZE		VENT FRAME OPENING SIZE				VENT FRAME OUTSIDE DIMENSIONS			
inches	cm	A		B		L		W	
		inches	cm	inches	cm	inches	cm	inches	cm
18 x 35	46 x 89	18	45,7	35	88,9	21	53,3	38	96,5
24 x 24	61 x 61	24	61,0	24	61,0	27	68,6	27	68,6
24 x 36	61 x 91	24	61,0	36	91,4	27	68,6	39	99,1
36 x 44	91 x 112	36	91,4	44	111,8	39	99,1	47	119,4



HEADQUARTERS //
 3160 W. Heartland Drive
 Liberty, MO 64068 USA
 Ph (816) 792 1500 | Fax (816) 792 2277
 sales@contdisc.com

contdisc.com

THE NETHERLANDS
 Energieweg 20
 2382 NJ Zoeterwoude-Rijndijk
 The Netherlands
 Ph +(31) 71 5412221 | Fax +(31) 71 5414361
 cdcnl@contdisc.com

CHINA
 Room 1312, Tower B, COFCO Plaza
 No. 8 JianGuoMenNei Avenue
 Beijing (10005), P.R. China
 Ph +(86) 10 522 4885 | Fax +(86) 10 6522 2885
 cdcchina@contdisc.com

INDIA
 423/P/11, Mahagujarat Industrial Estate, Moraiya,
 Sarkhej-Bavla Road, Ahmedabad (GJ)
 382213 INDIA
 Ph +(91) 2717 619 333 | Fax +(91) 2717 619 345
 gcempl@contdisc.com